

RYCO #184 ROLL GRADER

separates pelagic fish into size groups based upon body thickness.

Rates of 18 tons/hour possible with correct feed.

Grading accuracy equal or better than any roll grader available.

Quick and easy adjustment over wide range with manually operated crank.

Can be used alone, or in sets with one grader feeding another.

Standard Grader uses 11 rolls, each 4" diameter, 72" long.
Other sizes available.

Large 4" diameter rolls prevent bridging common with smaller rolls.

Roll guides force fish into roll gaps, and prevent cross transfer problems.

Simple, reliable drive system easily maintained and easily repaired.

Easily driven by electric or hydraulic motors.

Heavy stainless construction suitable for the most demanding applications.

FEATURES:

- Easy gap adjustments from 1/2" to 2.75" at both ends
- Heavy stainless construction
- Non-corroding components
- Suitable for shipboard installation

OPTIONS:

- Multiple sorts
- Vibratory Feed


SPECIFICATIONS MAY CHANGE, CONTACT RYCO FOR SPECIFIC APPLICATIONS

OVERLEAF: D4385-A1


Address: 6810 220th St. SW
Mountlake Terrace, WA
98043
USA

Phone #: 425-744-0444
Fax #: 425-673-2666


Web: rycous.com
E-mail: sales@rycous.com

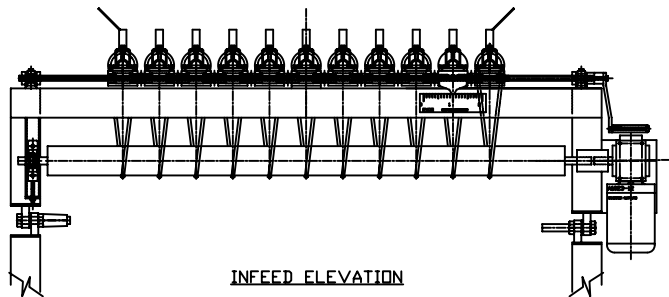


INFEEED ELEVATION

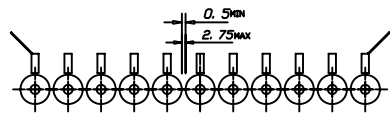

SECTION AT CENTER

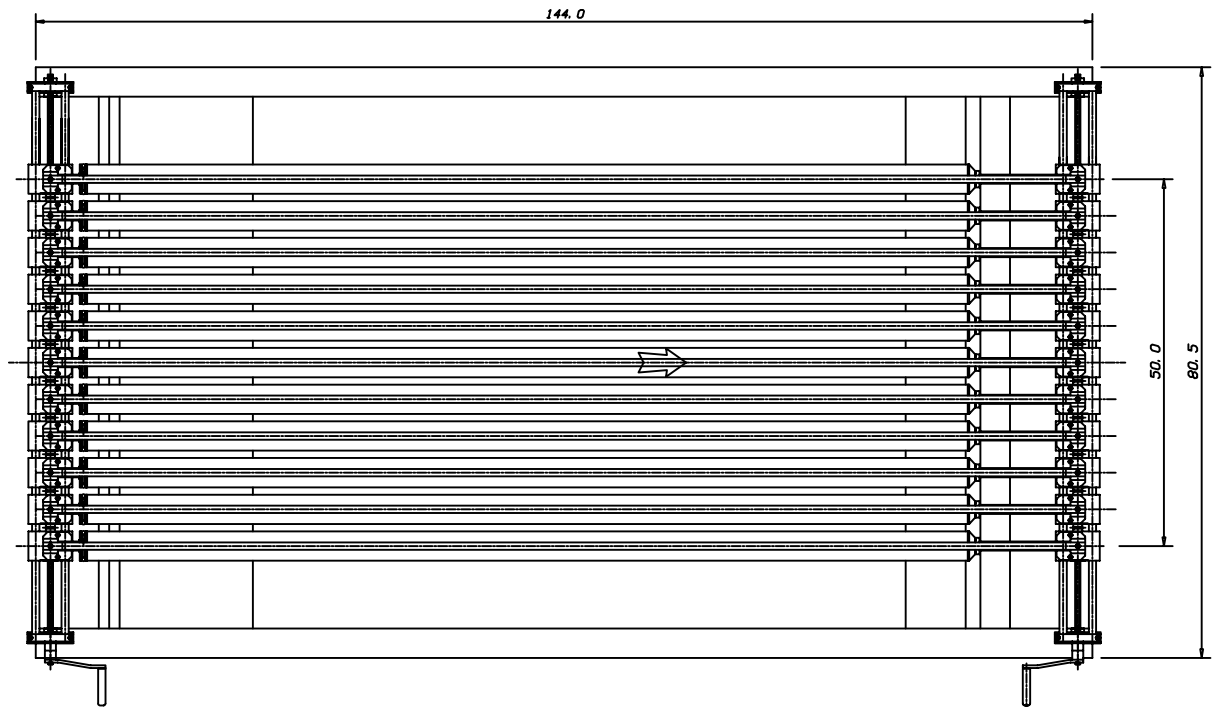

PLAN VIEW

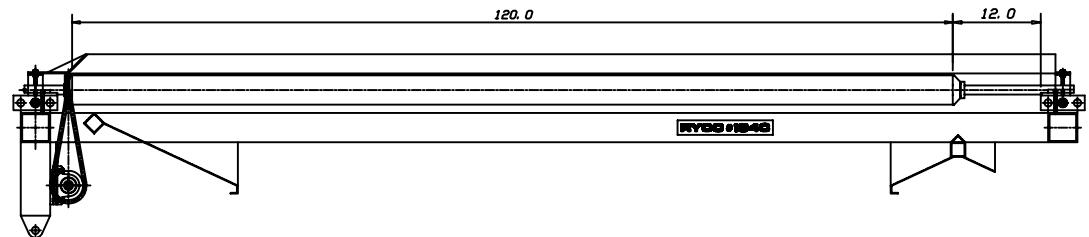

FRONT SIDE ELEVATION